


Your Company Name

YOUR LOGO

Email: companyemail@mail.com

Phone: 978-555-1504

1 Flatley Ave Manchester MA 01944,

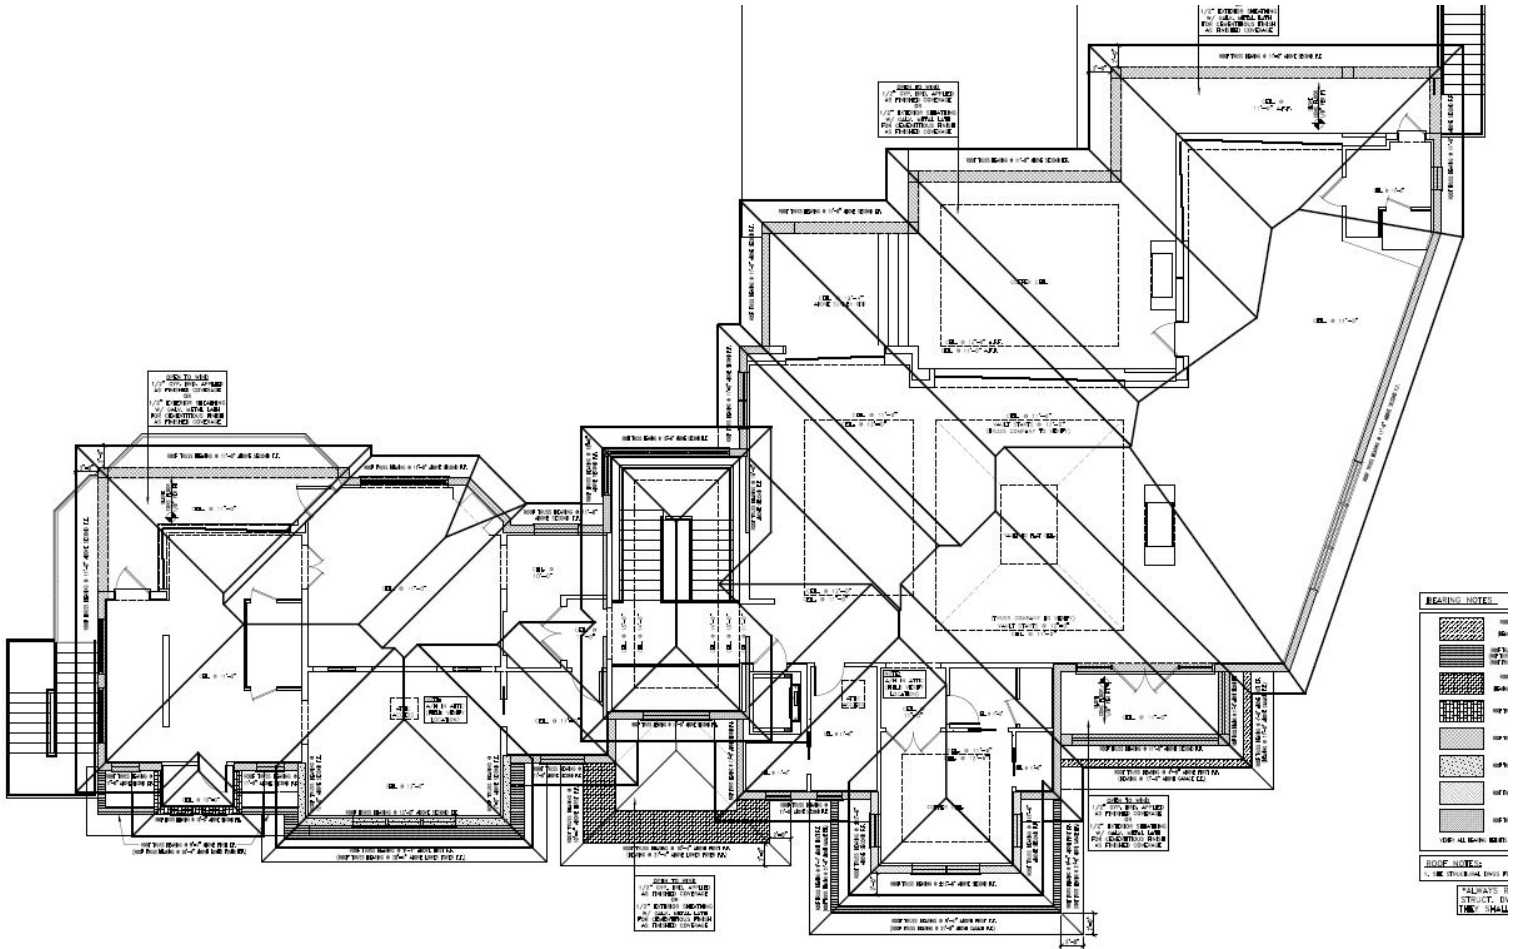

Total Roof Squares = 72.81			
-Total Roof Waste Factor-			
10%	15%	20%	25%
80.09	83.73	87.37	91.01





MyRoofReport
Expert Roof Measurements

Copyright © Offsite Roof Reports, LLC – All Rights Reserved www.MyRoofReport.com | (603)305-1456



Offsite Roof Reports, LLC accepts no liability for the any content of this report, or for the consequences of any actions taken on the basis of the information provided | Report for Planning Purpose only. This report was prepared from historical imagery. **Please have all Information provided verified before placing order for Materials.** Aerial Image provided as a client courtesy. Please use your professional expertise when applying waste factor, including Suggested waste factor for planning purpose only we accept no liability. See Website for further details

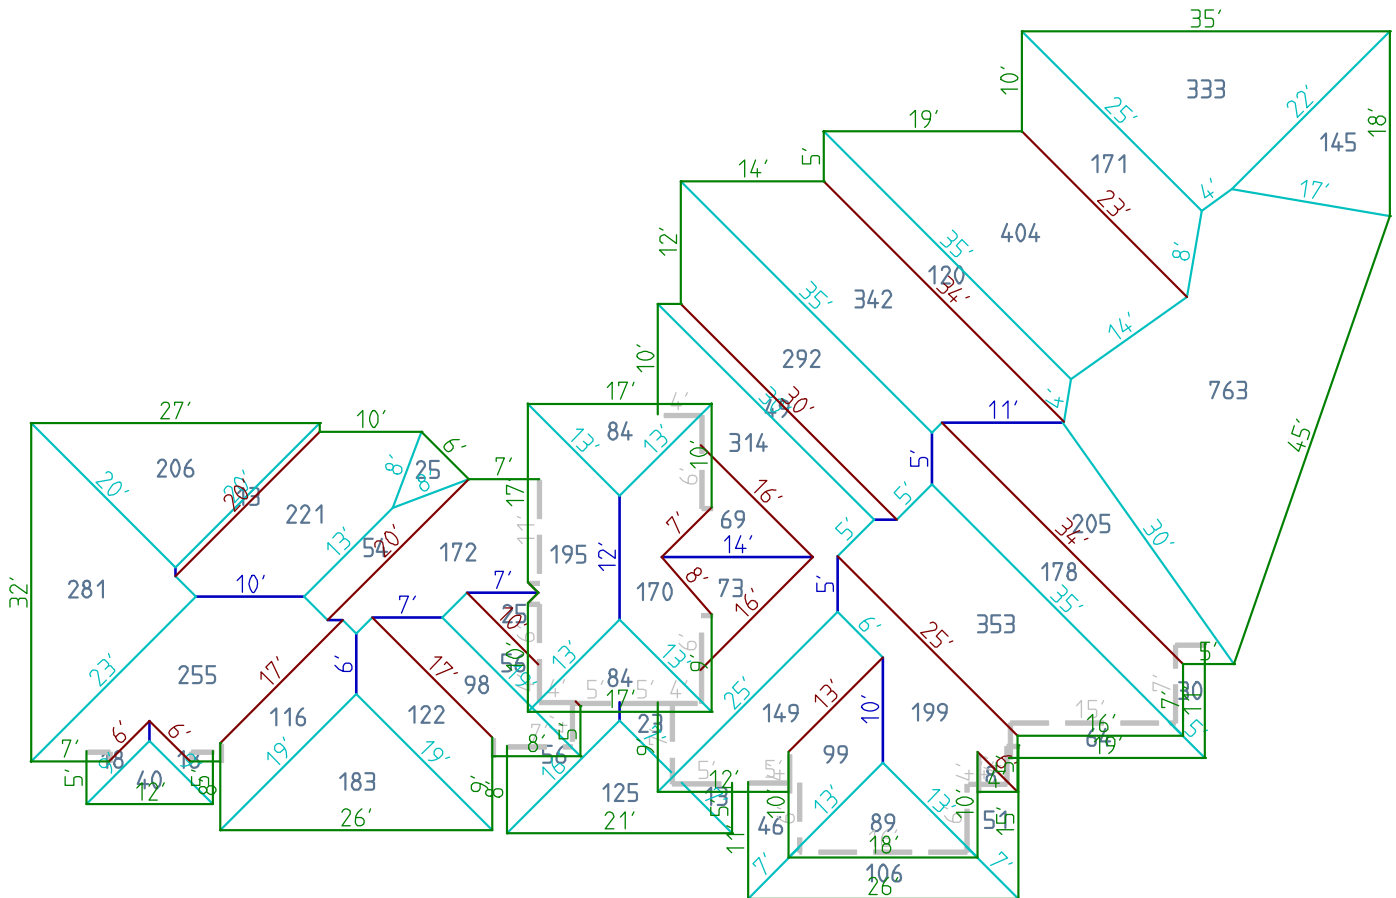

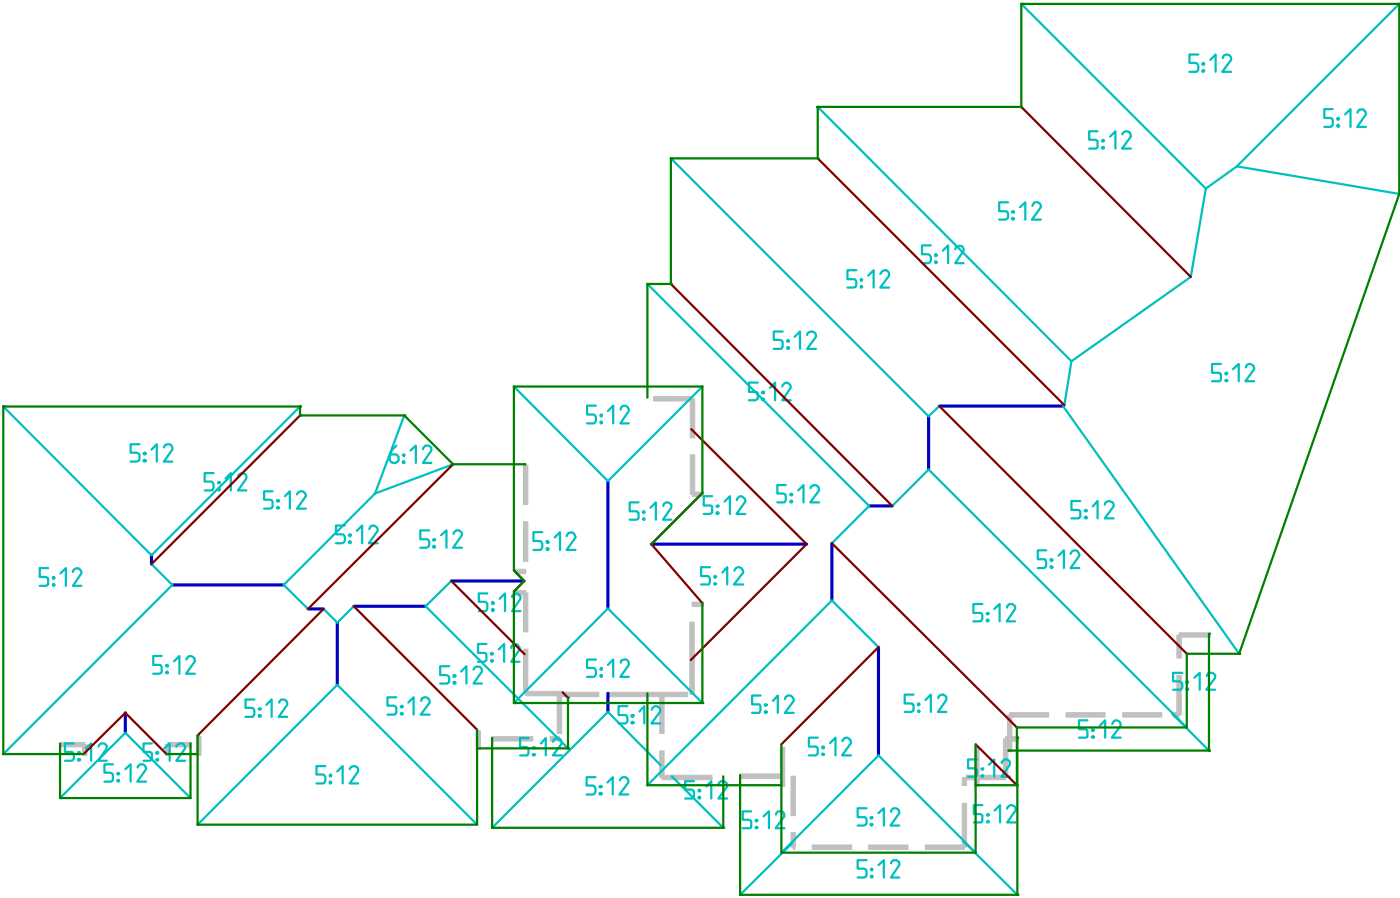

Metal (5:12) Total Squares = 72.81			
Metal Waste Factor			
10%	15%	20%	25%
80.09	83.73	87.37	91.01

Material Breakdown

	5:12 (Metal)
Total Squares	72.81
Ridge Length (ft)	95'
Eave Length (ft)	634'
Hip Length (ft)	614'
Valley Length (ft)	311'
Gable Length (ft)	0'
Step Flashing (ft)	97'
Apron Flashing (ft)	86'