

Your Company Name

Phone: 978-555-1504

Email: companyemail@mail.com



340 Regatta St, Manchester MA 01944




Total Roof Squares (All Material)

Total Squares	28.01
-Waste Factor-	
10%	30.81
15%	32.21
20%	33.61
25%	35.01

Offsite Roof Reports, LLC accepts no liability for the any content of this report, or for the consequences of any actions taken on the basis of the information provided | Report for Planning Purpose only. Please have all Information provided verified before placing order for Materials.



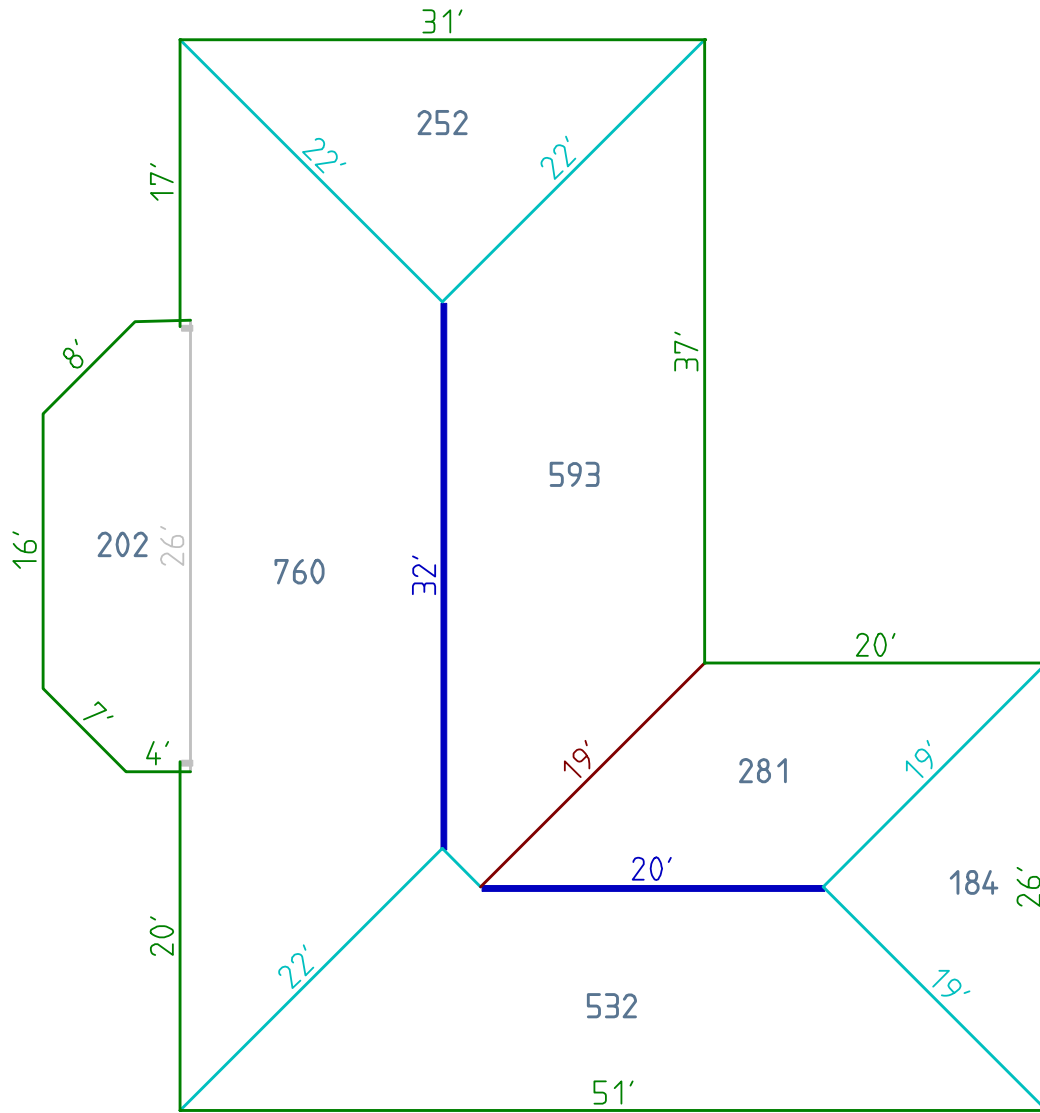

Ridge Length=52'

Eave Length=239'

Transition Length=26'

Valley Lengths=19'


Rake Length=0'

Step Flashing=1'

Hip Length=109'

Perimeter (Eave +Gable)=239'

Apron Flashing=0'

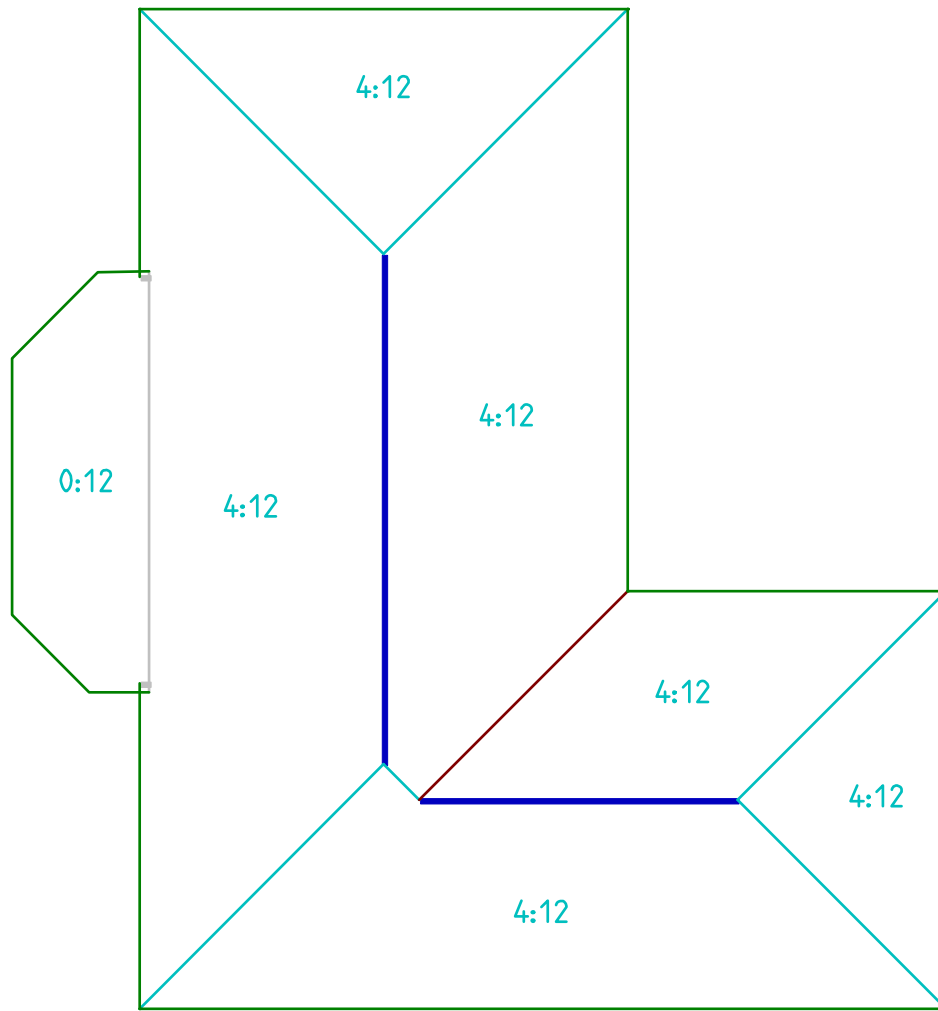

Metal (4:12) Total Squares = 25.99			
Waste Factor			
10%	15%	20%	25%
28.59	29.89	31.19	32.49

Material Breakdown

	Metal	Flat (0:12)
Total Squares	25.99	2.02
Ridge Length (ft)	52'	0'
Eave Length (ft)	202'	38'
Hip Length (ft)	109'	0'
Valley Length (ft)	19'	0'
Gable Length (ft)	0'	0'
Step Flashing (ft)	1'	0'
Apron Flashing (ft)	0'	0'

Standing Seam Metal Report

Coverage Width	24"
Total Panel Length	1,435
Panel Area (sqft)	2,870
Roof Area (sqft)	2,599
Panel Area/Roof Area Estimated Waste	9.50%
(Please use your professional expertise when applying any waste factor)	

Standing Seam Panel Cut List

19/17', 15/16', 4/15', 21/14', 6/13', 4/12', 8/11', 4/10', 8/9', 4/8', 8/7', 4/6', 8/5', 12/3', 4/1'
