

Your Company Name

YOUR LOGO

Email: companyemail@mail.com

Phone: 978-555-1504



Customer Information

4332 California Ave, Kenner, LA 70065



MyRoofReport



Copyright © Offsite Roof Reports, LLC – All Rights Reserved www.MyRoofReport.com | (603)305-1456

Offsite Roof Reports, LLC accepts no liability for the any content of this report, or for the consequences of any actions taken on the basis of the information provided | Report for Planning Purpose only. This report was prepared from historical imagery. **Please have all Information provided verified before placing order for Materials.** Aerial Image provided as a client courtesy. Please use your professional expertise when applying waste factor, including Suggested waste factor for planning purpose only we accept no liability. See Website for further details

Ridge Length=16'

Valley Lengths=0'

Hip Length=125'

Eave Length=228'


Rake Length=37'


Perimeter (Eave + Gable)=265'

Transition Length=0'

Step Flashing=0'

Apron Flashing=28'

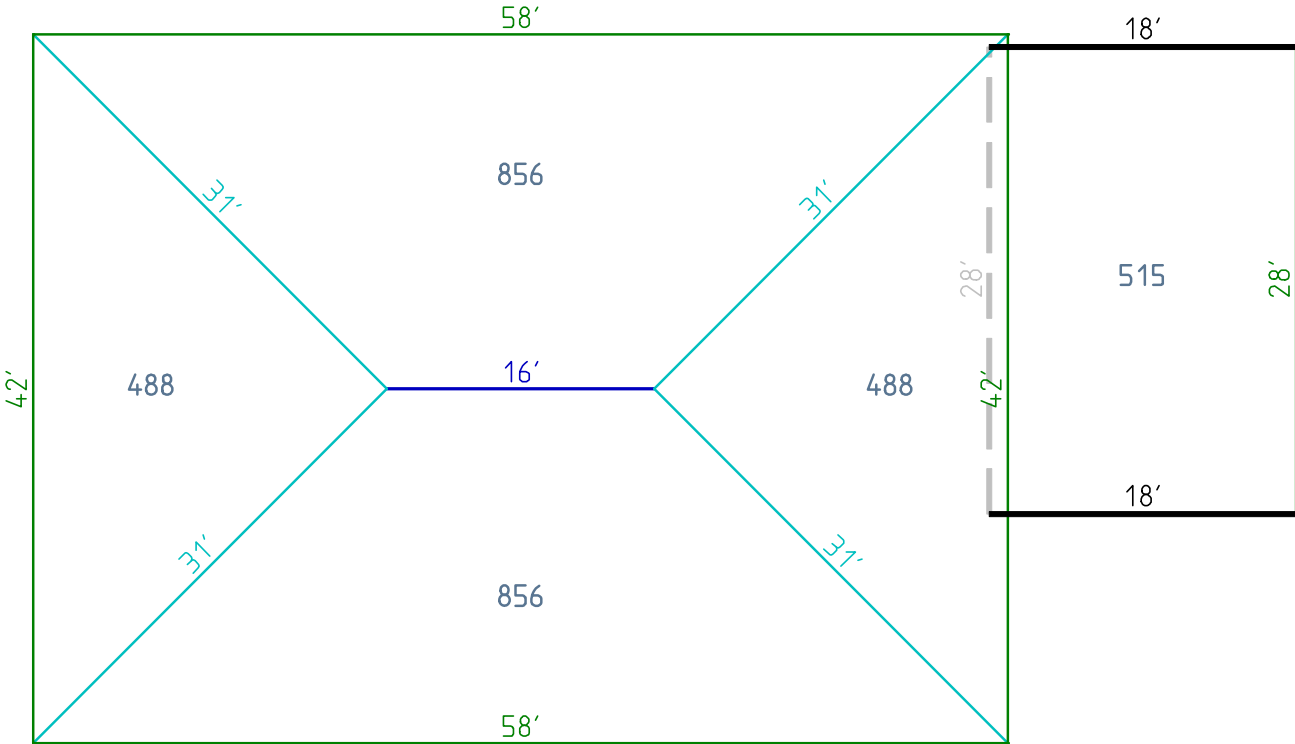

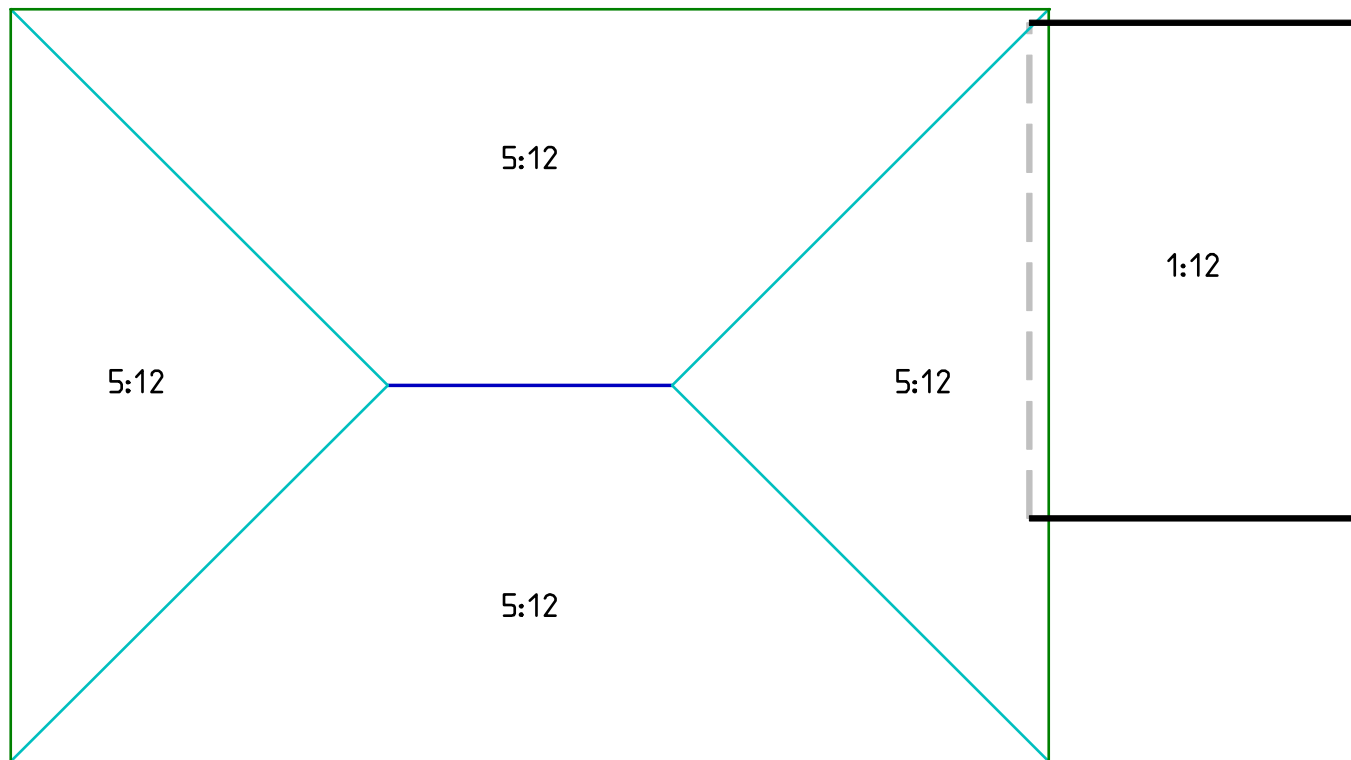

Shingle (5:12) Total Squares = 26.87				Suggested
Waste Factor				
10%	15%	20%	25%	11%
29.56	30.90	32.25	33.59	29.85

Suggested waste factor based off 3-Tab Shingle. Suggested waste factor does not account for your experience or expertise. Please factor that in. Please let us know if you're using a different roofing material.

	5:12	1:12
Total Squares	26.87	5.14
Ridge Length (ft)	16'	0'
Eave Length (ft)	201'	28'
Hip Length (ft)	125'	0'
Valley Length (ft)	0'	0'
Gable Length (ft)	0'	37'
Step Flashing (ft)	0'	0'
Apron Flashing (ft)	0'	28'

